

**GALVANIZED  
AFTER WEAVING**

# TREFORT

**GALVANIZED NETTING**


Hexagonal netting zinc-coated after manufacture using Cavatorta's unique "**Galvafort Process**". For use in industrial, construction, agricultural, breeding and diy sectors. **Trefort** fencing is sold in **50 m** rolls on pallets wrapped in recyclable polyethylene film.

mesh mm	∅ zinc coating mm/JDP	H cm	roll kg each	kg/m <sup>2</sup> each	roll/pallet n°	pallet kg each	tension wires longitud. no.
13,0	0,7-2	50	14	0,56	18	262	2
13,0	0,7-2	60	16	0,55	18	298	2
13,0	0,7-2	80	21,5	0,54	18	397	2
13,0	0,7-2	100	27	0,54	18	496	2
16,0	0,7-2	50	11,5	0,46	18	217	2
16,0	0,7-2	60	13,5	0,45	18	253	2
16,0	0,7-2	80	18	0,44	18	334	2
16,0	0,7-2	100	22	0,44	18	406	2
20,0	0,7-2	50	9,3	0,37	25	242,5	2
20,0	0,7-2	60	11	0,36	25	285	2
20,0	0,7-2	80	14,4	0,35	25	370	2
20,0	0,7-2	100	17,5	0,35	25	447,5	2
20,0	0,7-2	150	26	0,35	25	660	2
25,0	0,8-3	50	9	0,35	25	235	2
25,0	0,8-3	60	10,5	0,37	25	272,5	2
25,0	0,8-3	80	15	0,37	25	385	3
25,0	0,8-3	100	18,5	0,37	25	472,5	4
25,0	0,8-3	120	22	0,37	25	560	4
25,0	0,8-3	150	27,8	0,37	25	705	4
25,0	0,8-3	200	37	0,37	25	935	5
51,0	1,1-6	100	15	0,30	25	385	4
51,0	1,1-6	120	18	0,30	25	460	4
51,0	1,1-6	150	22,5	0,30	25	572,5	4
51,0	1,1-6	200	30	0,30	25	760	6

general characteristics	value	unit of measurement	referenced standards
single wires maximum tensile strength	450-550*	N/mm <sup>2</sup>	-
zinc coating type	hot dip	-	UNI-EN 10244-2
zinc purity grade (SHG)	~99,995%	-	UNI-EN 1179
zinc adherence	1 (excellent)	-	UNI-EN 10244-2
roll length tolerance	-0/+1	%	-

(\*) the values refer to the wire before construction of the mesh

The torsion of the wires and the hexagonal mesh together with the excellent quality standards and increased thickness of the zinc coating, obtained through the "**Galvafort Process**", gives **Trefort** fencing exceptional durability and malleability. This makes it unbeatable when used for special products such as protective barriers for ornamental flowering plants, and fencing for small pets such as rabbits and birds. **Trefort** also has a wide range of applications in the building industry as a support for fine plaster, quick drying and average drying floating screed, and as reinforcement for thermal and acoustic insulation materials.

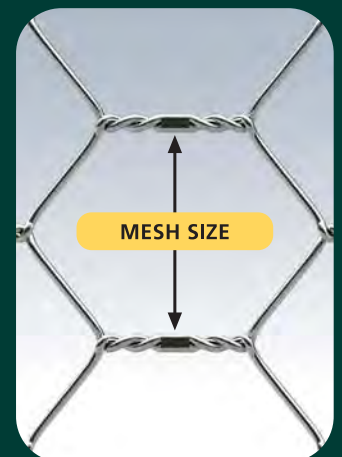

Upon request, it is possible to produce mesh and wires different from the standard measurements.

